

# 3/4" Rotogage® Assemblies for Small Stationary and Mobile LP-Gas Containers 2070 Series

## Application


Rotogage® dials are designed to provide accurate determination of LP-Gas container contents. They may be end or side mounted in a standard 3/4" NPT coupling on stationary or mobile containers. To guarantee accurate measurement, they should not be used on stationary containers that exceed 60" I.D. or on mobile containers, subject to vibration, with an I.D. of more than 24".

## Features

- Provides long, trouble-free performance and ease of operation.
- Polished stems ensure bind-proof operation.
- Dial face is dual calibrated to provide greater accuracy in reading contents in containers which are not level.


## Materials

Body ..... Brass  
 Stem ..... Brass Tubing  
 Dip Tube ..... Seamless Brass Tubing  
 Dial Plate ..... Aluminium  
 Indicator ..... Malleable Iron

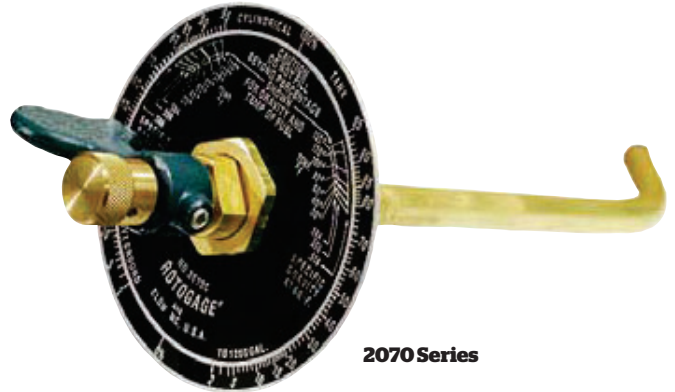

2070 Series

## 2070 Series Rotogage® Mounting Positions

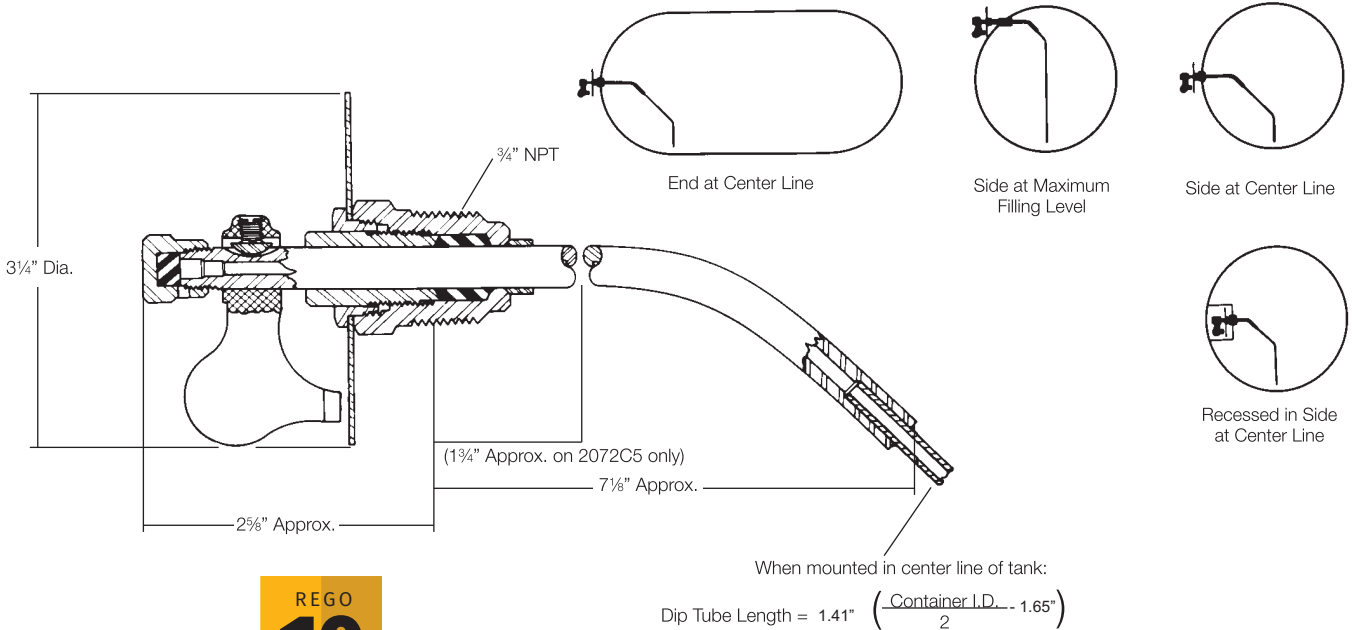

## Ordering Information

Part Number		For Containers with Inside Diameter	Tank Connection	Valve Seat Orifice
Rotogage® Dial	Dip Tube			
2070C0	2071-L25.7	Up to 40"	3/4 M. NPT	No. 54 Drill Size
	2071-L39.7	Up to 60"		

NOTE: The dip tube must be cut to the required length (1/2 of container inside diameter minus 1/2"), when mounted on center line of tank.